

Ceiling luminaires



The simple and sleek design of our ceiling luminaires offer an excellent choice for living spaces, be it kitchens, bathrooms, utility areas, study rooms and even bedrooms.

Ceiling luminaires

Mega range Baroque 72W



TCS701 Baroque 72

Ruby range

The Ruby range of luminaires is classically designed for large spaces. It has a built-in Philips conventional ballast which makes it last longer and more efficient. Equipped with a lampholder and connector block, it also has a high quality misted opal acrylic cover with a golden deco-line and patterns which can deliver a broad area with uniform light transmission. It has a durable diffuser for resisting yellowing.

Main applications

- Living rooms
- Bedrooms
- Study
- Balconies
- Aisle

Features

- Rich classical design for large spaces
- Built-in Philips conventional ballast – longer lasting and efficient
- Integrated lampholder and connector block
- High quality misted opal acrylic cover with golden deco-line & patterns, for uniform distribution
- Durable diffuser, resistant to yellowing
- Kombi pack with twin TLE lamps for brighter light

Technical description

- Power supply: 220
- Number of lamps: 1
- Lamp power: 72W
- Line frequency: 50Hz
- Current: 0.88A
- Power factor: 0.46
- Lampholder: G10q
- Kombi pack with twin TLE lamps (TLE40W & TLE32W)

Materials and finish

- PMMA diffuser, steel base plate with white paint.

Installation


- One option available: surface mounting.
- Please turn off the power supply if the product is not in use for a long time.

Classifications

- IP 20
- Class I



Dimensions in mm

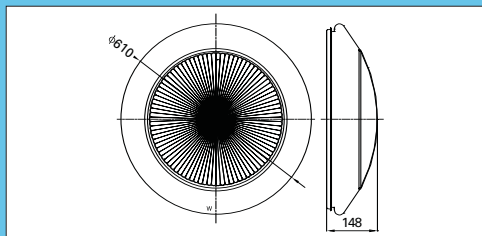

TCS701 Baroque 72

Product ID	Product Name	Product Family Code	Weight (kg)	Comm Code
TCS701 TL-E40W/865 220V-50Hz	Baroque	TCS701	4.00	910401616780



TCS191 Ridge

DecoTwist range Lux/Ridge/Blossom

DecoTwist range

DecoTwist Range includes Ridge, Lux and Blossom and is specially formulated to bring the clarity and detail of natural daylight indoors. This registered design based on Philips 'humane design' concept, it modifies itself naturally to accommodate and use an efficient circular light lamp, the light has proven to be extremely effective in terms of lighting performance. It is built in easy-to-fit lampholder and is capable to save up to 80% energy compare with standard incandescent lamps.

Main applications

- Living room
- Bedroom
- Study
- Children room
- Corridor

Features

- Integrated circular T5 tricolor lamp & electronic driver for uniform & extra brightness, in natural colors
- Durable UV resistant PMMA cover in matte finish for soft diffused light and little glare
- Resists yellowing

Technical description

- Power supply: 220~240
- Number of lamps: 1
- Lamp power: TL5-C 25W
- Line frequency: 50/60Hz
- Current: 0.19A
- Power factor: 0.6
- Lampholder: E27 or B22
- Lamp Source: DecoTwist 25W
- Lamp color: Coolday light/ Warm white

Materials and finish

- PMMA diffuser
- Steel base plate with white painting


Installation

- One option available: surface mounting (screw as lamp)
- Please turn off the supply power if the product is not in use for a long time.

Suitable lamp types

- Kombi pack with DecoTwist 25W

Dimensions in mm

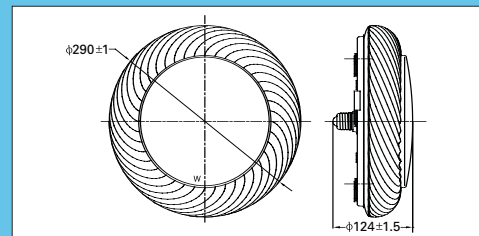


TCS191 Ridge


Ceiling luminaires

DecoTwist range Lux/Ridge/Blossom

Dimensions in mm

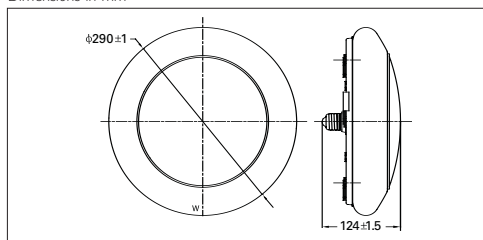

BCS1902 Lux

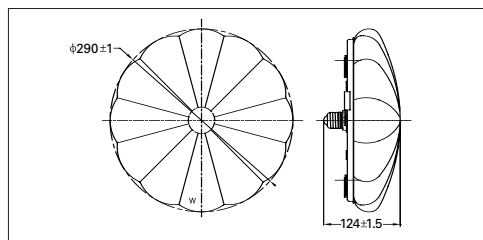

BCS1903 Blossom

Preferred selection

Product ID	Product Name	Product Family Code	Weight (kg)	Comm Code
TCS191 TL5 25W/WWW	Ridge	TCS191	0.87	929689879536
TCS191 TL5 25W/CDL	Ridge	TCS191	0.87	929689879636
TCS191 TL5 25W/WWW	Ridge	TCS191	0.87	929689889533
TCS191 TL5 25W/CDL	Ridge	TCS191	0.87	929689889633
TCS191 TL5 25W/WWW	Ridge	TCS191	0.87	929689879532
TCS191 TL5 25W/CDL	Ridge	TCS191	0.87	929689879632
TCS191 TL5 25W/WWW	Ridge	TCS191	0.87	929689889532
TCS191 TL5 25W/CDL	Ridge	TCS191	0.87	929689889632
TCS192 TL5 25W/WWW	Lux	TCS192	0.87	929689859536
TCS192 TL5 25W/CDL	Lux	TCS192	0.87	929689859636
TCS192 TL5 25W/WWW	Lux	TCS192	0.87	929689869533
TCS192 TL5 25W/CDL	Lux	TCS192	0.87	929689869633
TCS192 TL5 25W/WWW	Lux	TCS192	0.87	929689859532
TCS192 TL5 25W/CDL	Lux	TCS192	0.87	929689859632
TCS192 TL5 25W/WWW	Lux	TCS192	0.87	929689869532
TCS192 TL5 25W/CDL	Lux	TCS192	0.87	929689869632
TCS193 TL5 25W/WWW	Blossom	TCS193	0.87	929689839536
TCS193 TL5 25W/CDL	Blossom	TCS193	0.87	929689839636
TCS193 TL5 25W/WWW	Blossom	TCS193	0.87	929689849533
TCS193 TL5 25W/CDL	Blossom	TCS193	0.87	929689849633
TCS193 TL5 25W/WWW	Blossom	TCS193	0.87	929689839532
TCS193 TL5 25W/CDL	Blossom	TCS193	0.87	929689839632
TCS193 TL5 25W/WWW	Blossom	TCS193	0.87	929689849532
TCS193 TL5 25W/CDL	Blossom	TCS193	0.87	929689849632

DecoTwist slim range Lux/Ridge/Blossom

DecoTwist slim range

The DecoTwist Slim range is based on Philips 'humane design' concept. The range modifies itself naturally to accommodate and use an efficient circular light lamp. The light has proven to be extremely effective in terms of lighting performance providing up to 80% energy savings over standard incandescent lamps. It houses an efficient ballast for flicker-free light as well as an integrated circular T5 tricolor lamp and electronic driver for uniform and extra brightness, in natural colors.

Main applications

- Living rooms
- Bedrooms
- Study
- Balconies
- Aisle

Features

- Durable UV resistant PMMA cover in matte finish for soft diffused light and little glare. Resists yellowing and chipping
- Built-in easy-to-fit lampholder
- Up to 80% energy savings over standard incandescent lamps
- Up to 70% brighter than conventional TLE 22W options
- Long lamp life - lasts up to 6 times longer than standard incandescent lamps
- Instant, flicker-free operation between 170~250V

Technical description

- Power supply: 220~240
- Number of lamps: 1
- Lamp power: 25W
- Line frequency: 50~60Hz
- Current: 0.19A
- Power factor: 0.6
- Kombi pack with DecoTwist Slim 25W lamp

Materials and finish

- PMMA diffuser; steel base plate with white paint.

Installation

- One option available: surface mounting.
- Please turn off the power supply if the product is not in use for a long time.

Classifications

- IP 20
- Class I



TCS251 Ridge




TCS252 Lux



TCS253 Blossom

Dimensions in mm

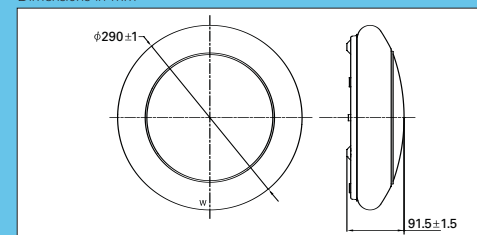

TCS251 Ridge

Ceiling luminaires


DecoTwist slim range Lux/Ridge/Blossom




TCS254 Lunar



TCS255 Tile

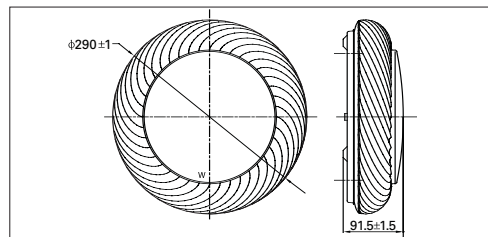

TCS252 Lux

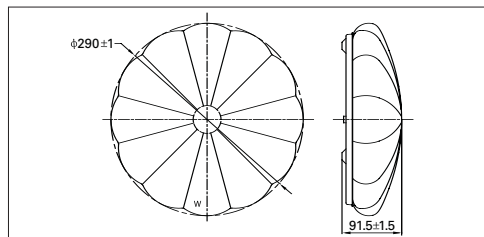

TCS253 Blossom

Preferred selection

Product ID	Product Name	Product Family Code	Weight (kg)	Comm Code
TCS251 TL5C25W/865 EI 220-240V	Ridge	TCS251	1.10	911401120180
TCS252 TL5C25W/865 EI 220-240V	Lux	TCS252	1.10	911401120280
TCS253 TL5C25W/865 EI 220-240V	Blossom	TCS253	1.10	911401120380
TCS254 TL5C25W/865 EI 220V	Lunar	TCS254	1.60	911401133880
TCS255 TL5C25W/865 EI 220V SI	Tile	TCS255	1.60	911401134280

DecoTwist slim range Ripple/Shell/Lustre/Twirl/Lunar/ Radiant/Chic/Fabric/MyStyle/Tile

DecoTwist slim range

The DecoTwist Slim range is based on Philips 'humane design' concept. They are similar to the TCS251 range, except for a larger size. The range modifies itself naturally to accommodate and use an efficient circular light lamp. The light has proven to be extremely effective in terms of lighting performance providing up to 80% energy savings over standard incandescent lamps. It houses an efficient ballast flicker free light as well as an integrated circular T5 tricolor lamp & electronic driver for uniform & extra brightness, in natural colors.

Main applications

- Living rooms
- Bedrooms
- Study
- Balconies
- Aisle

Features

- Durable UV resistant PMMA cover in matte finish for soft diffused light and little glare. Resists yellowing and chipping
- Built-in easy-to-fit lampholder
- Up to 80% energy savings over standard incandescent lamps
- Up to 70% brighter than conventional TLE 22W options
- Long lamp life - lasts up to 6 times longer than standard incandescent lamps
- Instant, flicker-free operation between 170~250V

Technical description

- Power supply: 220~240
- Number of lamps: 1
- Lamp power: TLE-C 25W
- Line frequency: 50~60Hz
- Current: 0.19A
- Power factor: 0.6
- Kombi pack with DecoTwist slim 25W lamp

Materials and finish

- PMMA diffuser; steel base plate with white paint.

Installation

- One option available: surface mounting.
- Please turn off the power supply if the product is not in use for a long time.

Classifications

- IP 20
- Class I



TCS281 Ripple




TCS282 Shell



TCS283 Lustre

Dimensions in mm

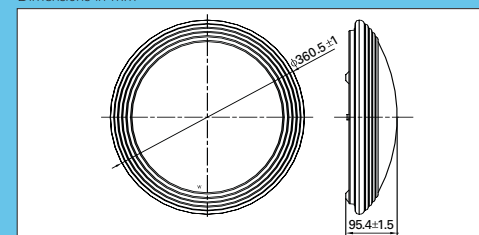

TCS281 Ripple

Ceiling luminaires

DecoTwist slim range
Ripple/Shell/Lustre/Twirl/Lunar/
Radiant/Chic/Fabric/MyStyle/Tile



TCS284 Twirl



TCS285 MyStyle



TCS286 Radiant




TCS287 Chic




TCS288 Fabric



TCS288 Fabric

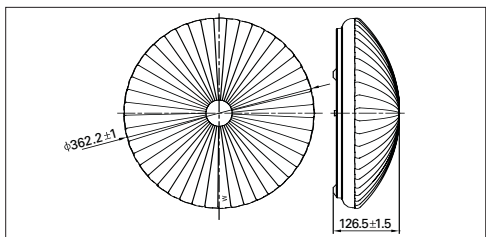

TCS282 Shell

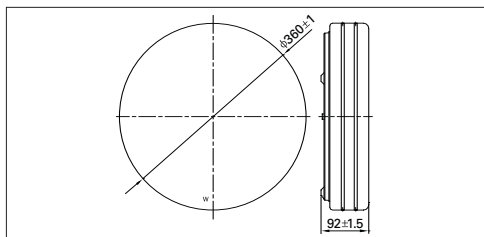

TCS283 Lustre

Preferred selection

Product ID	Product Name	Product Family Code	Weight (kg)	Comm Code
TCS281 TL5-25W/865 E1 220-240V	Ripple	TCS281	1.60	911401120480
TCS282 TL5-25W/865 E1 220-240V	Shell	TCS282	1.60	911401120580
TCS283 TL5-25W/865 E1 220-240V	Lustre	TCS283	1.60	911401120680
TCS284 TL5C25W/865 E1 220V SI	Twirl	TCS284	1.60	911401133780
TCS285 TL5C25W/865 E1 220V	MyStyle	TCS285	1.60	911401133980
TCS286 TL5C25W/865 E1 220V SI	Radiant	TCS286	1.60	911401134080
TCS287 TL5C25W/865 E1 220V SI	Chic	TCS287	1.60	911401134180

Pearl HF range
Lana/Lauren/Sunflower/Luxe



TCS351 Lana

Pearl HF range

The Pearl HF Range is a versatile fixture used in virtually any room. It has a built-in Philips HF ballast for instant-on with no flickering and less noise. It contains a durable diffuser for resisting yellowing.

Main applications

- Living rooms
- Bedrooms
- Study
- Balconies
- Aisle

Features

- Super slim classical design, suitable for every space
- Built in Philips HF ballast – flicker free, instant start & noiseless
- Energy saving
- Integrated lampholder and connector block
- High quality misted opal acrylic cover for uniform distribution
- Durable diffuser, resistant to yellowing
- Available in different patterns or metallic deco-line
- Kombi pack with Philips TLE 32W color 80 lamp, for brighter natural colors

Technical description

- Power supply: 220~240V
- Number of lamps: 1
- Lamp power: 32W
- Line frequency: 50/60Hz
- Current: 0.16A
- Power factor: 0.93
- Lampholder: G10q
- Kombi pack with Philips TLE 32W color 80 lamp

Materials and finish

- PMMA diffuser, steel base plate with white paint.

Installation


- One option available: surface mounting.
- Please turn off the power supply if the product is not in use for a long time.

Classifications

- IP 20
- Class I



Dimensions in mm

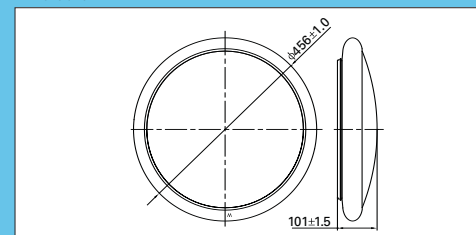

TCS351 Lana

Ceiling luminaires

Pearl HF range
Lana/Lauren/Sunflower/Luxe

Dimensions in mm



TCS352 Lauren




TCS356 Sunflower




TCS359GO Luxe




TCS359SI Luxe

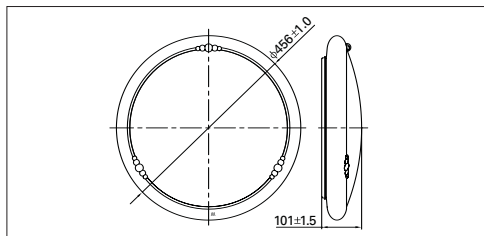

TCS352 Lauren

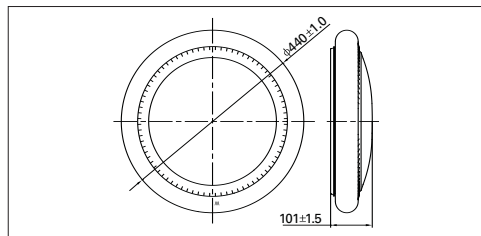

TCS356 Sunflower

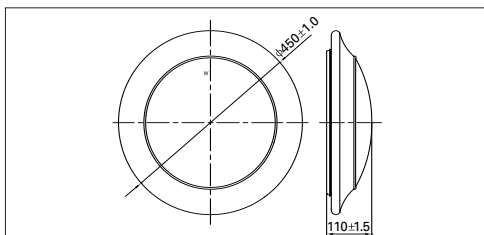

TCS359 Luxe

Preferred selection

Product ID	Product Name	Product Family Code	Weight (kg)	Color	Comm Code
TCS351 TL-E32W/865 HF 220V-50Hz	Lana	TCS351	2.40	No	910401619280
TCS352 TL-E32W/865 HF 220V-50Hz	Lauren	TCS352	2.40	No	910401619380
TCS356 TL-E32W/865 HF 220V-50Hz	Sunflower	TCS356	2.40	No	910401619780
TCS359 TL-E32W/865 HF 220V-50Hz GO	Luxe	TCS359	2.40	GO	910401624680
TCS359 TL-E32W/865 HF 220V-50Hz SI	Luxe	TCS359	2.40	SI	910401624780

Slim pearl range
Film/Décor G/F/Décor A/E

Slim pearl range

This luminaire range is adorned with cute graphics, and is well suited to both domestic and public environments. It can characterize its surroundings discreetly or with decisive impact when mounted in a composition on the ceiling. It contains a high quality misted opal acrylic cover for uniform distribution and a durable diffuser to avoid yellowing.

Main applications

- Living rooms
- Bedrooms
- Study
- Balconies
- Aisle

Features

- Super slim, trendy design
- Built-in Philips conventional ballast – longer lasting and efficient
- Integrated lampholder and connector block, more convenient to install and clean
- High quality misted opal acrylic cover for uniform distribution
- Durable diffuser, resistant to yellowing
- Kombi pack with Philips TLE 32W color 80 lamp, for brighter natural colors
- Energy saving
- Cute graphics to appeal to children

Technical description

- Power supply: 220V
- Number of lamps: 1
- Lamp power: 32W
- Line frequency: 50Hz
- Current: 0.44A
- Power factor: 0.39
- Lampholder: G10q
- Kombi pack with Philips TLE 32W lamp

Materials and finish

- PMMA diffuser; steel base plate with white paint.

Installation

- One option available: surface mounting.
- Please turn off the power supply if the product is not in use for a long time.

Classifications

- IP 20
- Class I



TCS311 Film




TCS323 SI Décor A/E



TCS323 GO Décor A/E

Dimensions in mm

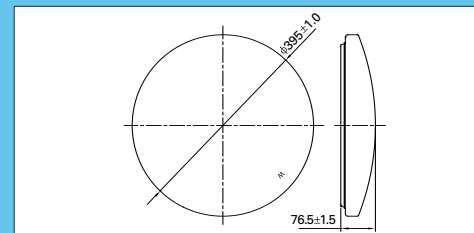


TCS311 Film


Ceiling luminaires

Slim pearl range
Film/Décor G/F/Décor A/E

Dimensions in mm

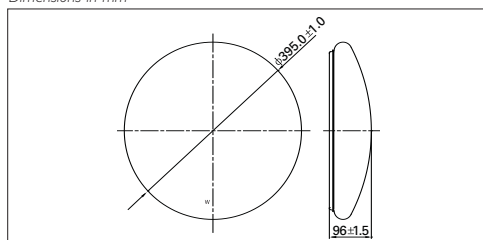

TCS322 Décor G/F

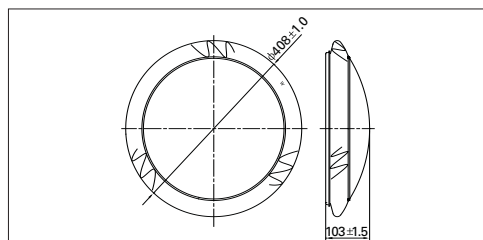

TCS323 Décor A/E


Preferred selection

Product ID	Product Name	Product Family Code	Weight (kg)	Color	Comm Code
TCS311 TL-E32W/840 240V-50Hz	Film	TCS311	2.10	No	911401128480
TCS322 TL-E32W/865 220V-50Hz ANI	Décor G/F	TCS322	2.10	ANI	910401616080
TCS322 TL-E32W/865 220V-50Hz HUM	Décor G/F	TCS322	2.10	HUM	910401616180
TCS323 TL-E32W/865 220V-50Hz GO	Décor A/E	TCS323	2.10	GO	910401614180
TCS323 TL-E32W/865 220V-50Hz SI	Décor A/E	TCS323	2.10	SI	910401614580



TCW321 Mercury

Dimensions in mm

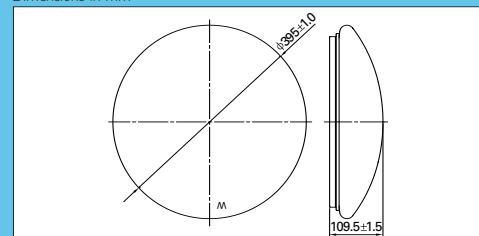

TCW321 Mercury

Slim pearl range
Mercury IP54

Slim pearl range

This luminaire range with cute graphics is well suited to both domestic and public environments. It can characterize its surroundings discreetly or with decisive impact when mounted in a composition on the ceiling. It contains a high quality misted opal acrylic cover for uniform distribution and a durable diffuser to avoid yellowing. It is rigorously tested for dust and water ingress protection.

Main applications

- Living rooms
- Bedrooms
- Study
- Balconies
- Aisle

Features

- Modern design
- Built-in PHILIPS conventional ballast – longer lasting and efficient
- Integrated lampholder and connector block, more convenient to install & clean
- High quality misted opal acrylic cover for uniform distribution
- Durable diffuser, resistant to yellowing
- Combipacked with PHILIPS TLE 32 W lamp, for brighter natural colors
- Energy saving
- Dust & water proof

Technical description

- Power supply: 220V/240V
- Number of lamps: 1
- Lamp power: 32W
- Line frequency: 50Hz
- Current: 0.44A
- Power factor: 0.4
- Lampholder: G10q
- Combipacked with PHILIPS TLE 32W lamp

Materials and finish

PMMA diffuser; steel base plate with white paint.

Installation

One option available: surface mounting. Please turn off the power supply if the product is not in use for a long time.

Classifications

- IP 20
- Class I



Product ID	Product Name	Product Family Code	Weight (kg)	Comm Code
TCW321TL-E32W/865 220V-50Hz-IP54	Mercury	TCW321	2.50	910401621680

Ceiling luminaires

Standard pearl range Baroque 32W



TCS305 Baroque

Standard pearl range

The range is designed in today and tomorrow's contemporary styles. It can characterize its surroundings discreetly or with decisive impact when mounted in a composition on the ceiling. It contains a high quality misted opal acrylic cover for uniform distribution and a durable diffuser to avoid yellowing.

Main applications

- Living rooms
- Bedrooms
- Study
- Balconies
- Aisle

Features

- Rich patterned design
- Built-in Philips conventional ballast – longer lasting and efficient
- Integrated lampholder and connector block for extra convenience
- High quality misted opal acrylic cover with golden deco-line for uniform distribution
- Durable diffuser; resistant to yellowing
- Kombi pack with Philips TLE 32W color 80 lamp, for brighter natural colors
- Energy saving

Technical description

- Power supply: 220V
- Number of lamps: 1
- Lamp power: 32W
- Line frequency: 50Hz
- Current: 0.44A
- Power factor: 0.39
- Lampholder: G10q
- Kombi pack with Philips TLE 32W color 80 lamp

Materials and finish

- PMMA diffuser; steel base plate with white paint.

Installation


- One option available: surface mounting.
- Please turn off the power supply if the product is not in use for a long time.

Classifications

- IP 20
- Class I



Dimensions in mm

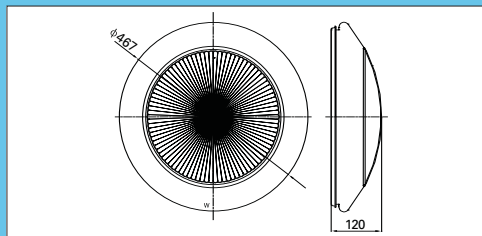

TCS305 Baroque

Product ID	Product Name	Product Family Code	Weight (kg)	Comm Code
TCS305 TL-E32W/865 220V-50Hz	Baroque	TCS305	2.40	910401611280

Jade range Clean/Jeery



TCS201 Clean

Jade range

This range of ceiling luminaires is engineered with utmost emphasis on style and quality down to the smallest details. The ballast, lampholder, connector block and polypropylene plastic base form a balanced combination with a simple yet graceful shape. In addition, it is dust and waterproof.

Main applications

- Kitchens
- Bathrooms
- Laundry rooms

Features

- Simple yet graceful design
- Built-in Philips conventional ballast – longer lasting and efficient
- Integrated lampholder and connector block for extra convenience
- High quality misted opal acrylic diffuser for uniform distribution, resistant to yellowing
- Polypropylene plastic base
- Kombi pack with Philips TLE 22W lamp, for brighter natural colors
- Energy saving
- Dust & waterproof

Technical description

- Power supply: 220V
- Number of lamps: 1
- Lamp power: 22W
- Line frequency: 50Hz
- Current: 0.39A
- Power factor: 0.34
- Lampholder: G10q
- Kombi pack with Philips TLE 22W lamp

Materials and finish

- PMMA diffuser; steel base plate with white paint.

Installation


- One option available: surface mounting.
- Please turn off the power supply if the product is not in use for a long time.

Classifications

- IP 54
- Class I



Dimensions in mm

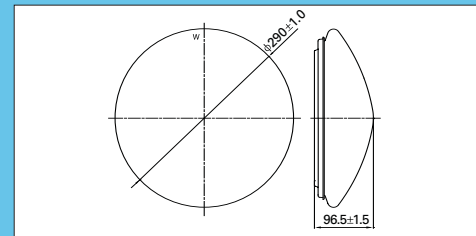


TCS201 Clean

Ceiling luminaires

Jade range Clean/Jeery

Dimensions in mm

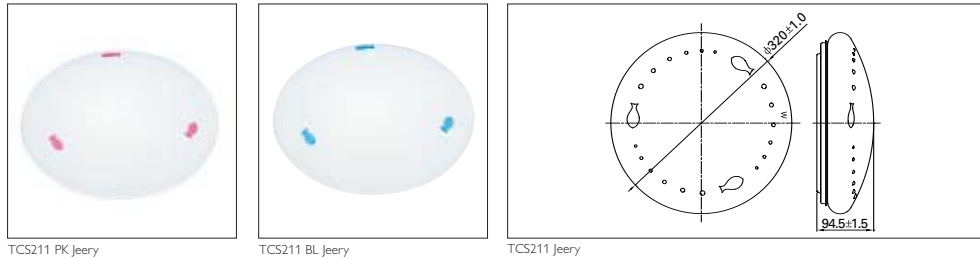

TCS211 PK Jeery

TCS211 BL Jeery

TCS211 Jeery

Preferred selection

Product ID	Product Name	Product Family Code	Weight (kg)	Color	Comm Code
TCS201 TL-E22W/840 240V-50Hz	Clean	TCS201	1.70	No	911401128280
TCS201 TL-E22W/865 220V-50Hz	Clean	TCS201	1.70	No	910401957580
TCS211 TL-E22W/865 220V-50Hz BL	Jeery	TCS211	1.70	BL	910401624480
TCS211 TL-E22W/865 220V-50Hz PK	Jeery	TCS211	1.70	PK	910401627280

Jade range Sealer/Closet NG



TCW211 Sealer



TCW212 Closet NG

Jade range

This product is simple yet elegant. It comes with a built-in Philips conventional ballast which can last longer and is more efficient. It features a lampholder, connector block and a durable misted opal acrylic diffuser for uniform distribution. It also has a polypropylene plastic base. In addition, it is dust and waterproof.

Main applications

- Kitchens
- Bathrooms
- Laundry rooms

Features

- Simple yet graceful design
- Built-in Philips conventional ballast - longer lasting and efficient
- Integrated lampholder and connector block for extra convenience
- High quality misted opal acrylic diffuser for uniform distribution, resistant to yellowing
- Polypropylene plastic base
- Kombi pack with Philips TLE 22W lamp, for brighter natural colors
- Energy saving
- Dust & waterproof

Technical description

- Power supply: 220V/240V
- Number of lamps: 1
- Lamp power: 22W
- Line frequency: 50Hz
- Current: 0.39A
- Power factor: 0.34
- Lampholder: G10q
- Kombi pack with Philips TLE 22W lamp

Materials and finish

- PMMA diffuser, steel base plate with white paint.

Installation


- One option available: surface mounting.
- Please turn off the power supply if the product is not in use for a long time.

Classifications

- IP 54
- Class I



Dimensions in mm

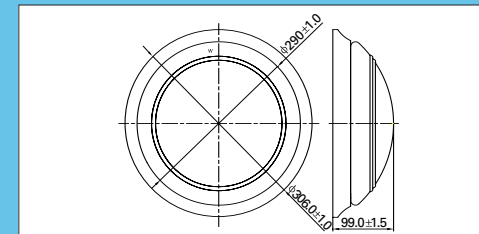


TCW212 Sealer

Ceiling luminaires

Jade range Sealer/Closet NG

Dimensions in mm

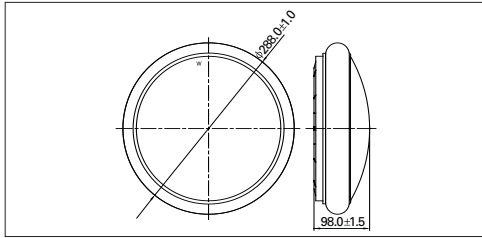

BCW2102 Closet NG

Preferred selection

Product ID	Product Name	Product Family Code	Weight (kg)	Comm Code
TCW211 TL-E22W/865 220V-50Hz IP54	Sealer	TCW211	1.80	910401959180
TCW212 II	Closet NG	TCW212	2.00	911401128380

Eco range
Deco X/Deco Y/Deco Z



TCS133 Deco Y

Eco range

The Eco range of luminaires is simple yet gracefully designed. It features a lampholder, a connector block and a durable misted opal acrylic diffuser for uniform distribution. With a built-in Philips conventional ballast, it is efficient and lasts longer.

Main applications

- Living rooms
- Bedrooms
- Study
- Balconies
- Aisle

Features

- Simple graceful design
- Durable misted opal acrylic diffuser for uniform distribution, resistant to yellowing
- Built-in Philips conventional ballast – longer lasting and efficient
- Integrated lampholder and connector block for extra convenience
- Kombi pack with Philips TLE 32W lamp

Technical description

- Power supply: 220V
- Number of lamps: 1
- Lamp power: 22W/ 32W
- Line frequency: 50Hz
- Current: 0.39A/ 0.44A
- Power factor: 0.34/ 0.39
- Lampholder: G10q
- Kombi pack with Philips TLE 22W/54, TLE 32W/54 lamp

Materials and finish

- PMMA diffuser, steel base plate with white paint.

Installation


- One option available: surface mounting.
- Please turn off the power supply if the product is not in use for a long time.

Classifications

- IP 54
- Class I



Dimensions in mm

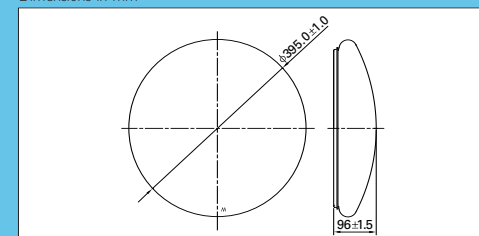

TCS130/TCS133/TCS132

Ceiling luminaires


Eco range
Deco X/Deco Y/Deco Z



TCS132 Deco X



TCS122 Deco Z

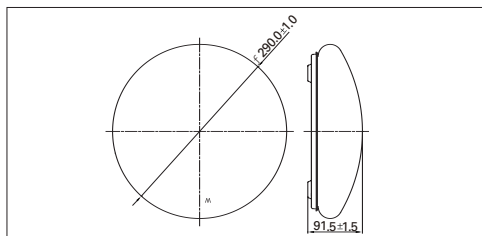

TCS122 Deco Z

Preferred selection

Product ID	Product Name	Product Family Code	Weight (kg)	Rated Power Lamps [W]	Comm Code
TCS122.TL-E22W/54 220V-50Hz	Deco Z	TCS122	1.70	22	910401625483
TCS130.TL-E32W/54 220V-50Hz	-	TCS130	2.10	32	910401958180
TCS132.TL-E32W/54 220V-50Hz	Deco X	TCS132	2.10	32	910401625383
TCS133.TL-E32W/54 220V-50Hz	Deco Y	TCS133	2.10	32	910401625283

Eco range Closet II IP54



TCW122 Closet II

Eco range (Closet II)

This product is simple yet elegant. It features a lampholder, a connector block and a durable misted opal acrylic diffuser for uniform distribution. The unit is equipped with a lampholder and a connector block for extra convenience. Special attention was devoted to its dust and waterproof ability.

Main applications

- Kitchens
- Bathrooms
- Laundry rooms

Features

- Simple yet graceful design
- Durable misted opal acrylic diffuser for uniform distribution, resistant to yellowing
- Built-in Philips conventional ballast – longer lasting and efficient
- Integrated lampholder and connector block for extra convenience
- Kombi pack with Philips TLE 22W lamp
- Dust & waterproof

Technical description

- Power supply: 220V
- Number of lamps: 1
- Lamp power: 22W
- Line frequency: 50Hz
- Current: 0.39A
- Power factor: 0.34
- Lampholder: G10q
- Kombi pack with Philips TLE 22W lamp

Materials and finish

- PMMA diffuser, PC baseplate.

Installation


- One option available: surface mounting.
- Please turn off the power supply if the product is not in use for a long time.

Classifications

- IP 54
- Class I



Dimensions in mm

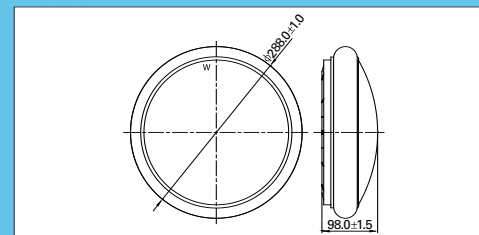

TCW122 Closet II

Product ID	Product Name	Product Family Code	Weight (kg)	Comm Code
TCW122.TL-E22W/54 220V-50Hz IP54	Closet II	TL-E	2.00	910401625583